
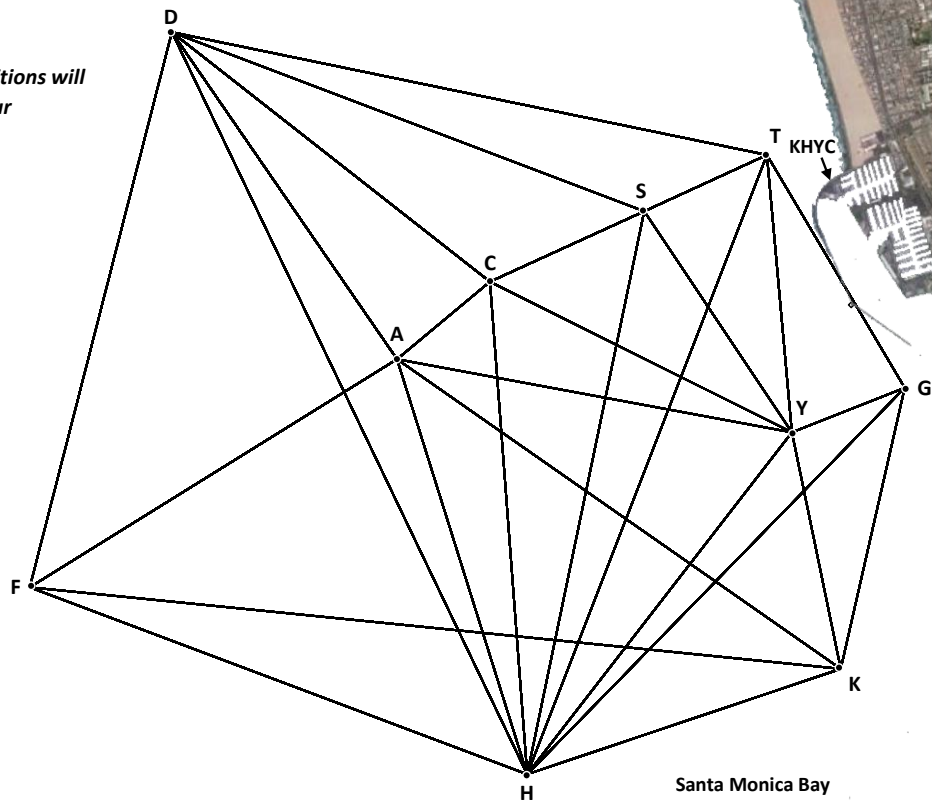


King Harbor Yacht Club

Mark Guide - Revised 08/10/22

This information is for your guidance. Mark positions will change from time to time, a condition beyond our immediate control. You are responsible for your own navigation.



USCG Registered Mark Locations

Racing Mark	N Latitude		W Longitude		Depth MLLW	Buoy Type	Racing Mark	N Latitude		W Longitude		Depth MLLW	Buoy Type
	Deg	Min	Deg	Min				Deg	Min	Deg	Min		
D-Mark	33	51.340	118	26.437	196'	Yellow Spar	"2ES"	33	54.697	118	27.558	85'	Bell Buoy
T-Mark	33	51.010	118	24.282	37'	Yellow Spar	mdrT-Mark	33	56.463	118	31.458	171'	Yellow Spar
S-Mark	33	50.858	118	24.727	66'	Yellow Spar	mdrDD-Mark	33	56.647	118	30.898	155'	Yellow Spar
C-Mark	33	50.668	118	25.285	256'	Yellow Spar	mdrSS-Mark	33	57.547	118	28.093	46'	Yellow Spar
A-Mark	33	50.460	118	25.626	398'	Yellow Spar	Malibu BW	34	02.010	118	40.352	29'	Mooring
F-Mark	33	49.847	118	26.952	264'	Yellow Spar	"10PV" red	33	46.400	118	26.697	142'	Bell Buoy
G-Mark	33	50.383	118	23.783	94'	Bell Buoy	Pt. Vicente	33	44.280	118	24.870	74'	Outer Rock
Y-Mark	33	50.263	118	24.192	70'	Yellow Spar	TCTM	34	01.800	118	33.803	32'	Temp Mark
H-Mark	33	49.343	118	25.150	160'	Yellow Spar	"6PF"	33	41.930	118	17.502	54'	Bell Buoy
K-Mark	33	49.627	118	24.015	54'	Yellow Spar	Angels Gate	33	42.513	118	15.098	27'	LA Light
W-Mark	33	50.490	118	23.682	10'	RB-MC1	CBYC 82	33	43.060	118	13.560	33'	Yellow Spar

Approximate Magnetic Heading/Distance in nmi

From → To ↓	A	C	D	F	G	H	K	S	T	Y
A		221/0.3	130/1.1	048/1.3	260/1.5	328/1.2	289/1.6	229/0.8	231/1.2	267/1.2
C	041/0.3		112/1.2	047/1.6	270/1.3	342/1.3	302/1.5	235/0.5	235/0.9	281/1.0
D	310/1.1	292/1.2		003/1.6	281/2.4	319/2.3	298/2.6	276/1.5	268/1.8	287/2.2
F	228/1.3	227/1.6	183/1.6		246/2.7	276/1.6	262/2.4	229/2.1	230/2.5	247/2.3
G	080/1.5	090/1.3	101/2.4	066/2.7		035/1.5	002/0.8	109/0.9	134/0.8	058/0.4
H	148/1.2	162/1.3	139/2.3	096/1.6	215/1.5		241/1.0	180/1.6	191/1.8	208/1.2
K	109/1.6	122/1.5	118/2.6	082/2.4	182/0.8	061/1.0		142/1.4	158/1.4	154/0.7
S	049/0.8	055/0.5	096/1.5	049/2.1	289/0.9	000/1.6	322/1.4		235/0.4	311/0.7
T	051/1.2	055/0.9	088/1.8	050/2.5	314/0.8	011/1.8	338/1.4	055/0.4		342/0.8
Y	087/1.2	101/1.0	107/2.2	067/2.3	238/0.4	028/1.2	334/0.7	131/0.7	162/0.8	